




**szwengao**

## Isolated DC/DC Converter Specification

Model No.: WGI05-48S24M

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
36-75V DC	24V DC	5 Amps	120 Watts	91%	74*74*29.5mm

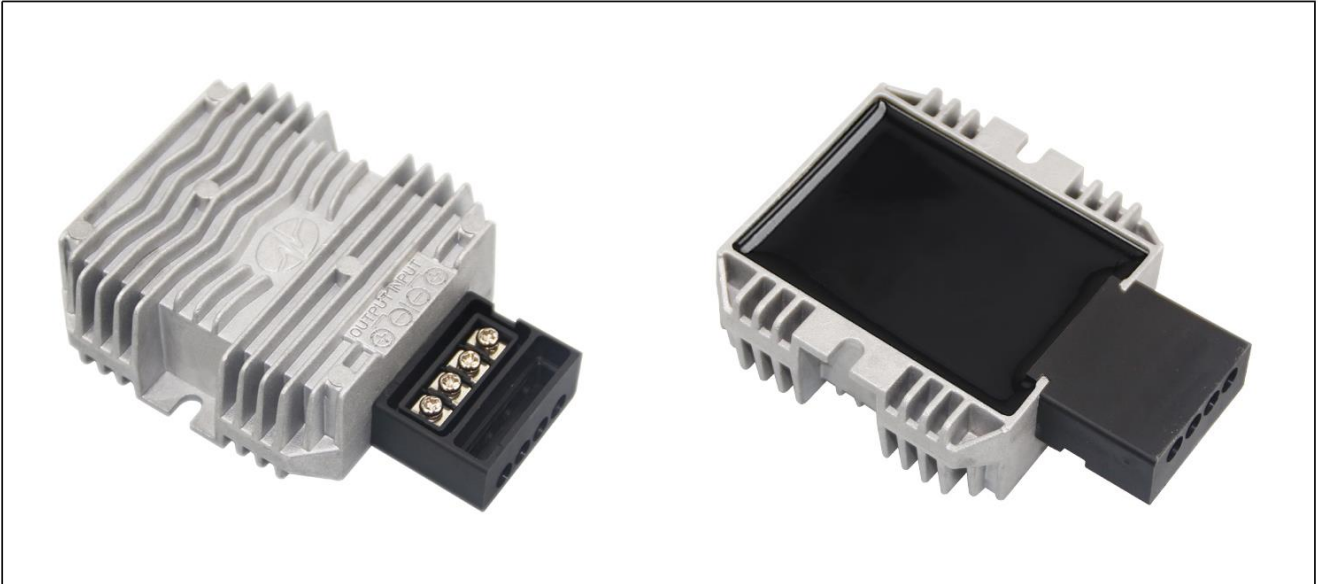

The WGI05-48S24M is an isolated DC-DC converter that uses a synchronous rectification technology, and features high efficiency and power density. It has the dimensions of 74mm x 74mm x 29.5mm (2.91 in. x 2.91 in. x 1.16 in) and provides the rated output voltage of 24V and the maximum output current of 5A.

### Features

- Design meeting RoHS / CE
- High efficiency: 91% (@ 48Vin, 25°C)
- Isolated between input and output
- Imported components, high reliability
- 100% full load burn-in test
- Short circuit, Over load, Over temperature, **reverse** protections
- Waterproof level IP67
- 2 Years warranty

### Applications

- Industrial
- Alternative Energy
- Golf Cart & Forklift
- EV & RVs
- Electromotor
- Telecommunications
- Boat & Yacht
- Medical and so on.

### Model naming method

# WGI05-48S24M

**WG**: "szwengao" company name

**48** : Input rated voltage

**S** : Single output type

**24** : Output voltage

**05** : Output current

**I** : Isolated type

**M** : Shape of shell

**Electrical Specifications**

Conditions: TA = 25° C (77° F), Airflow = 1.0 m/s (200 LFM), Vin = 48V, Vout = 24V , unless otherwise specified.

Parameter	Min.	Typ.	Max.	Units	Remarks
<b>Absolute maximum ratings</b>					
Operating ambient temperature	-40	-	+55	° C	
Shell ambient temperature	-40	-	80	° C	
Storage temperature	-55	-	100	° C	
Operating humidity	5	-	95	%	Non-condensing
Atmospheric pressure	62	-	106	Kpa	
Altitude	-	-	2000	m	
Cooling way	-	-	-		Natural cooling
<b>Input characteristics</b>					
Input voltage	36	48	75	V	-
Max. input voltage	-	-	78	V	Continuous
Undervoltage shutdown	30	34.5	36	V	Automatic recovery
Undervoltage recovery	31	35.5	36	V	Automatic recovery
Max. input current	-	-	6	A	Vin = 36V; Iout = 5A
No load current	-	20	50	mA	Vin = 48V
Positive electrode cable	18	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	18	-	-	AWG	
Enable PIN cable	-	-	-	AWG	If the product has this feature
Fuse	-	10	-	A	
<b>Output characteristics</b>					
Efficiency	-	91	-	%	Vin = 48V; Iout = 5A
Output voltage	23.65	24	24.35	V	Vin = 48V; Iout = 5A
Regulator accuracy	-	±3	±5	%	
Voltage regulation	-	±2	±3	%	
Load Regulation	-	±1	±2	%	
Overvoltage protection	-	-	40	V	Hiccup mode (output)
Output current	0	-	5	A	
Overcurrent protection	6	7	10	A	
External capacitance	-	-	-	µF	Don't need
Output ripple and noise	-	18	300	mVp-p	Vin = 36-75 V; Oscilloscope bandwidth: 20 MHz;
Output voltage rise time	-	8	50	mS	
Boot delay time	-	55	300	mS	
Out voltage overshoot	-	-	5	%	
Over temperature protection	-	-	90	° C	Shell temperature, @ 70° C Restore working
Short circuit protection	-	YES	-		Long-term (4 hours) short circuit is not damaged, Hiccup mode
Positive electrode cable	18	-	-	AWG	If the wire length is greater than 50cm, it is recommended to use a thicker wire diameter.
Negative electrode cable	18	-	-	AWG	




Safety and EMC features				
Anti-electric Strength	Input to Output	≥1500	V	Leakage current ≤ 1mA, 1min, no breakdown, no arcing
	Input to Shell	≥1500	V	
	Output to Shell	≥500	V	
Insulation resistance	Input to Output	≥10	MΩ	Test voltage = 500V
	Input to Shell			
	Output to Shell			
Other characteristics				
Weight	≤290		g	
Package	White box			
MTBF	≥100,000		H	Vin = 48V; Iout = 5A
Switching frequency	130±10		KHz	


**Characteristic Curves**

Conditions: TA = 25° C (77° F), Vin = 48 V, Vout = 24V , unless otherwise specified.


**Figure 1, Efficiency**

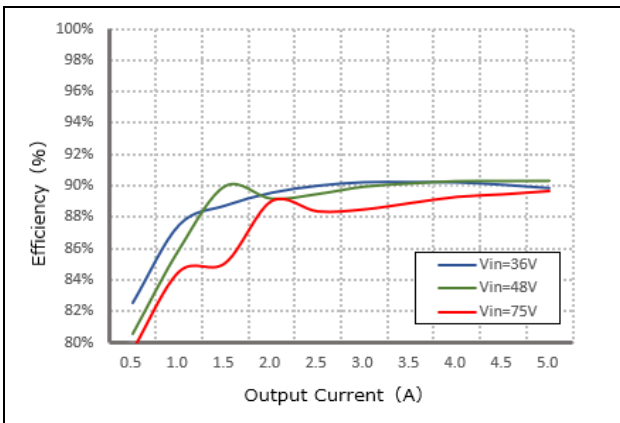

**Figure 2, Power dissipation**

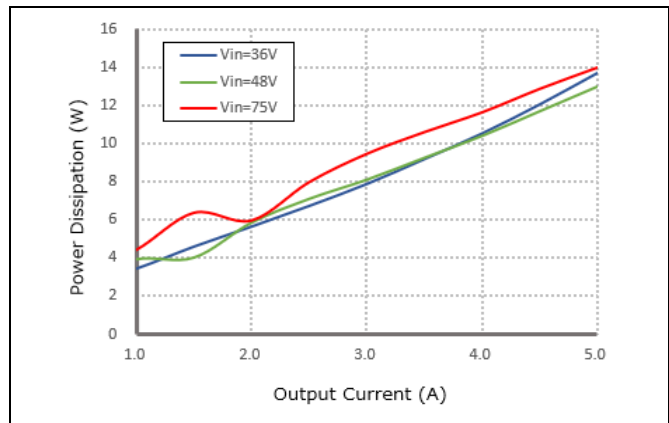


**Figure 3, Input V-I**

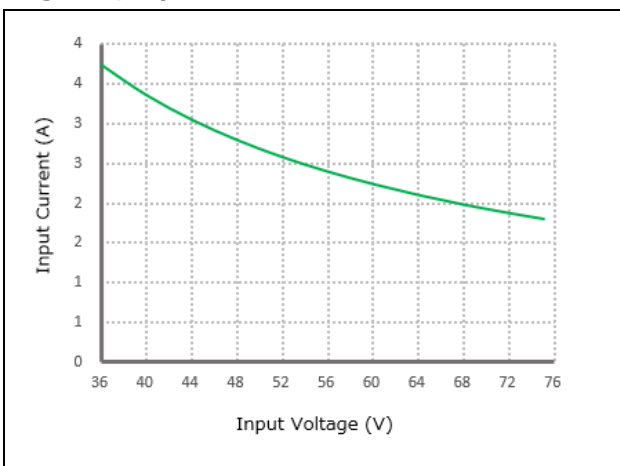


**Typical Waveforms**

Conditions: TA = 25° C (77° F), Vin = 48V, unless otherwise specified.


**Figure 4, 50% - 75% load dynamic**

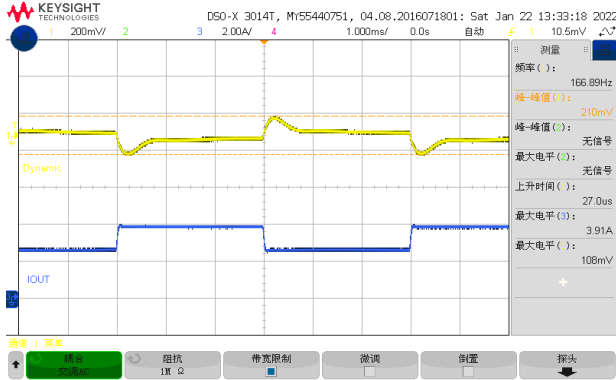


**Figure 5, Output voltage established (Iout = 5A)**

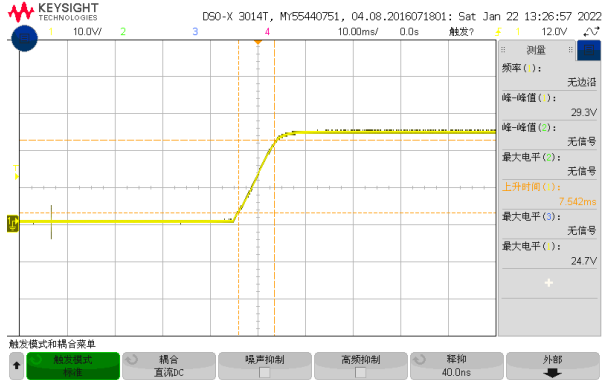


**Figure 6, Output ripple & noise (Iout = 5A)**

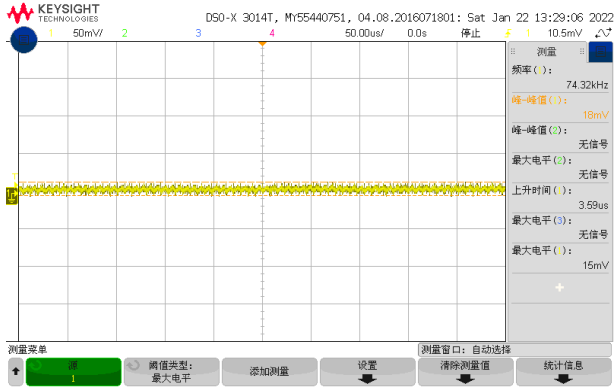

**Figure 7, Boot delay time**

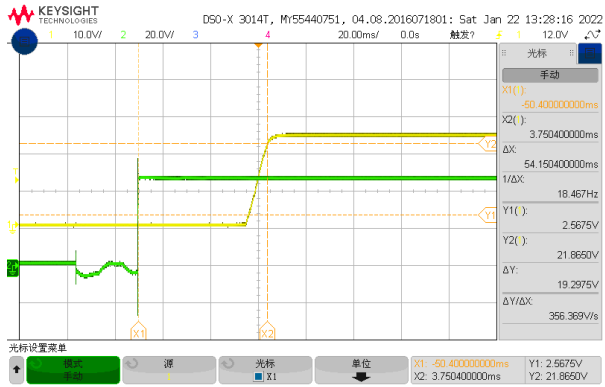

**Figure 8, Short circuit & Output voltage**

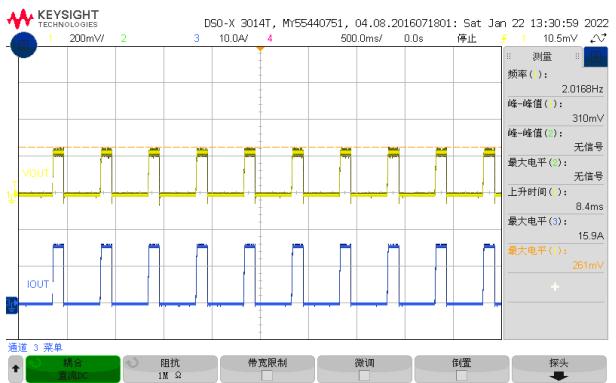




**Feature Description**


**Remote On/Off (CNT) (Optional)**

Logic Enable	Low level (0 - 30Vdc)	High level (32 - 75Vdc)	Left open
Positive logic	Off	On	Off


**Various circuits for driving the CNT**




Simple control

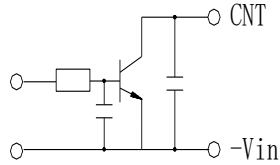

Transistor control



Isolation control

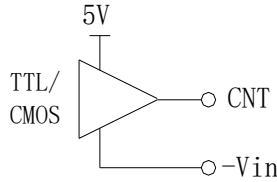

Direct logic drive

**Overtemperature Protection**

A temperature sensor on the converter senses the average temperature of the module. It protects the converter from being damaged at high temperatures. When the temperature exceeds the over temperature protection threshold, the output will shut down. It will allow the converter to turn on again when the temperature of the sensed location falls by the value of Over temperature Protection Hysteresis

**Reverse Protection**

Reverse voltage protection circuits prevent damage to power supplies and electronic circuits in the event of a reverse voltage applied at the input terminals. The protection ensures that the components are not damaged by accidental swap of the power supply connections.

**Input Undervoltage Protection**

The converter will shut down after the input voltage drops below the under-voltage protection threshold for shutdown. The converter will start to work again after the input voltage reaches the input under voltage protection threshold for startup. For the Hysteresis, see the Protection characteristics.

**Output Overcurrent Protection**

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection set point, the converter enters hiccup mode. When the fault condition is removed, the converter will automatically restart.

**Output Overvoltage Protection**


When the voltage directly across the output pins exceeds the output overvoltage protection threshold, the converter will enter hiccup mode. When the fault condition is removed, the converter will automatically restart.




**Thermal Consideration**

Sufficient airflow should be provided to help ensure reliable operating of the WGI05-48S24M.

Therefore, thermal components are mounted on the top surface of the WGI05-48S24M to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the middle of the base plate.

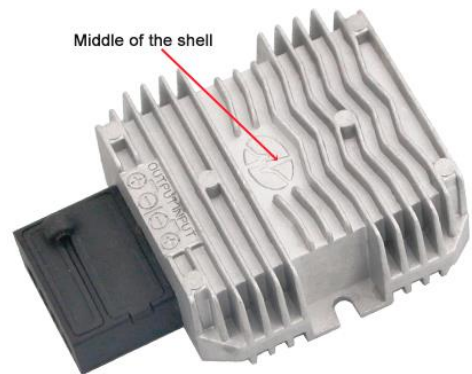

**Dimension (unit: mm)**

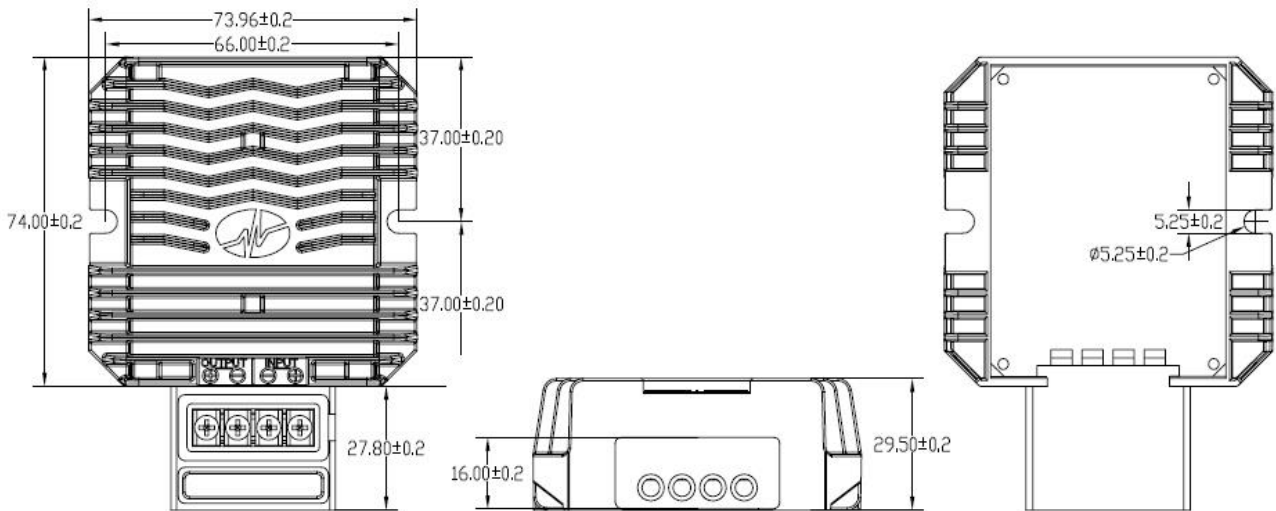

**Shenzhen Wengao Electronic Co., Ltd**

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061

F: +86 755 29418061

E: [info@wengaoelec.com](mailto:info@wengaoelec.com)

W: [www.wengaoelec.com](http://www.wengaoelec.com)